

Marine Electromagnetic  
Cooking Equipment

**Main Features**

Use the principle of electromagnetic induction heating, high thermal efficiency, quick heating rate, no pollution.

Use importing fittings, robust bowl type glass-ceramic top microcomputer control, SUS304 entire stainless steel structure heating up when cooking.

The firepower may adjust at will, maintain food of the color, fragrance and nutrient well.

Over load protection function, once food baking, the pot has superheat, the electromagnetic oven can stop the heating automatically.

One horizontal heating panels, a concave heating panel and the bottom is a storing board.

Widely applied in all kinds of ships, hotels, offshore platform, etc.

Model	Voltage	Rating	Size(W×D×H)	N.W
CCZ-5	220-380V/3P/50-60Hz	5kW	650×755×850(+120)mm	70Kg
CCZ-10	380-440V/3P/50-60Hz	10kW	90Kg	



CCZ-5



CCZ-10



## CCZ Series Electromagnetic Stove

### Main Features

Use high quality fitting, SUS304 for the whole structure  
Use the new craft, the separation formula of electric hot plate, the heater life 2-3 times higher than other similar products.  
Equipped with guard against the wave frame, temperature control, easy to operate  
Widely applied in all kinds of ships, hotels, offshore platform, etc.

### CRZ-4 Single Hot Plate Electric Stove



Model	Desk Type	Cabinet Type
Voltage	220-440V/ 3P/ 50-60Hz	220-440V/ 3P/ 50-60Hz
Rating	4kW	4kW
Size(W×D×H)	500 x500 x300mm	500 x500 x850mm
N.W	38Kg	45Kg



### CRZ-12 Three Hot Plate Electric Stove

Model	CRZ-12
Voltage	220-440V/ 3P/ 50-60Hz
Rating	12kW
Size(W×D×H)	1500 x600 x850(+85)mm
N.W	120Kg



### CRZ-18 Four Hot Plate Electric Stove

Model	CRZ-18
Voltage	220-440V/ 3P/ 50-60Hz
Rating	17.6kW
Size(W×D×H)	840x900 x850mm
N.W	180Kg

### CRZ-9 Two Hot Plate Electric Stove



Model	CRZ-9
Voltage	220-440V/ 3P/ 50-60Hz
Rating	8kW
Size(W×D×H)	1000 x670 x850mm
N.W	85Kg

### CRZ-12 Two Hot Plate Electric Stove with Oven



Model	CRZ-12
Voltage	220-440V/ 3P/ 50-60Hz
Rating	11.6kW
Size(W×D×H)	1000 x670 x850mm
N.W	120Kg




### CRZ-30 Six Hot Plate Electric Stove

Model	CRZ-30
Voltage	220-440V/ 3P/ 50-60Hz
Rating	27.6kW
Size(W×D×H)	1300x900 x850mm
N.W	290Kg



# Marine Professional Electric Cooking Equipment

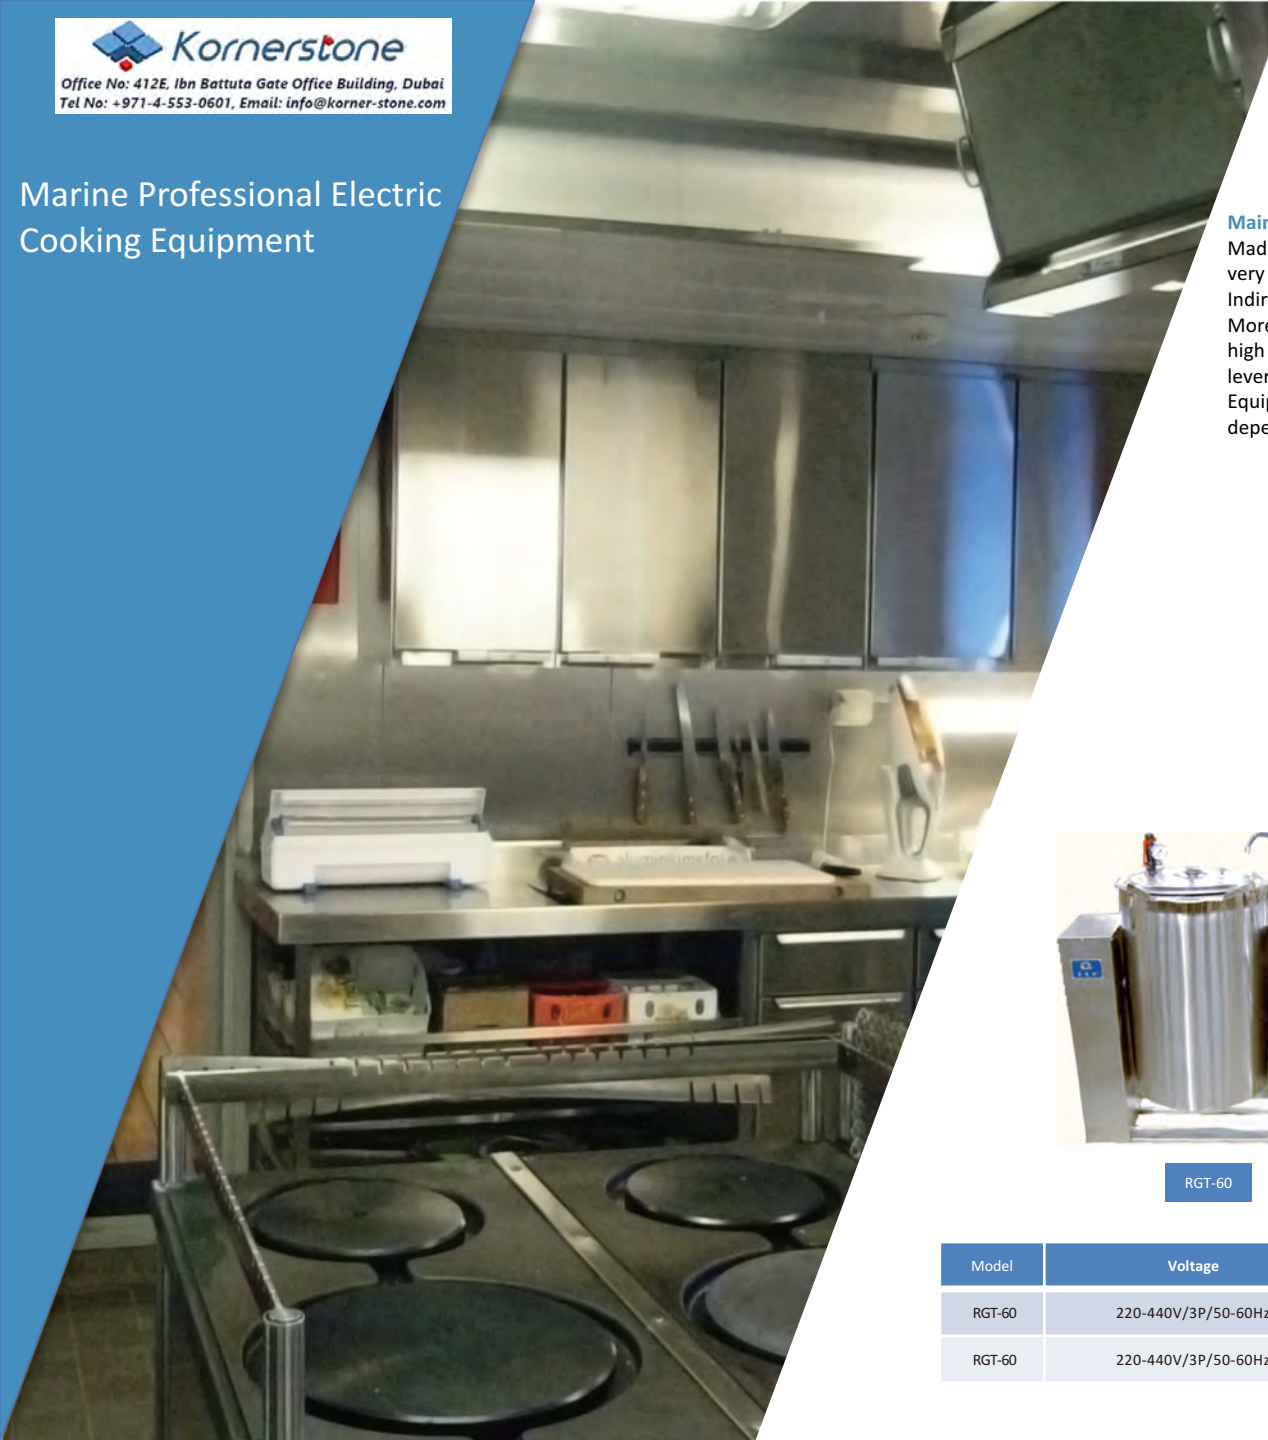

**Main Features**

Made of stainless steel with reasonable structure, very sturdy and durable.  
 Indirect heating, external layer is filled with thermal insulation material.  
 More area to absorb heat, heat the pot body uniformly, short boiling time, high heating efficiency. Design of rotary manual tilting device and low water level automatic power off protection device.  
 Equipped with pressure gauge and safety valve, easy to use, safe and dependable.



RGT-120



RGT-60




Model	Voltage	Rating	Capacity	Size(W×D×H)	N.W
RGT-60	220-440V/3P/50-60Hz	9kW	60L	970x 700x 1100mm	100kg
RGT-60	220-440V/3P/50-60Hz	9+9 kW	60+60 L	1800x 700x 1100mm	300kg

## Marine Tilting Frying Pan

**Main Features**  
 Overall structure of stainless steel, designed with rounded edges.  
 Rotary manual tilting device.  
 Heating temperature is between 60°(and 300°), and can be set freely.  
 Induction system on the pan bottom will automatically stop heating when the pan body tilt.  
 Equipped with water injection device in the back side for easy cleaning.



RKC-9

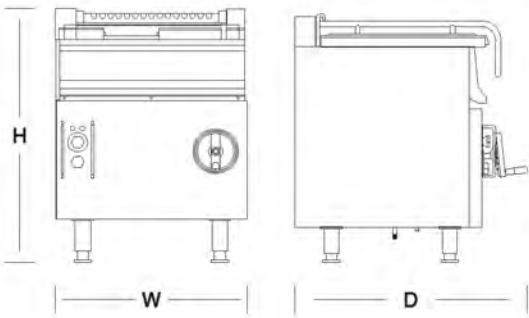

RKC-9B

Model	Voltage	Rating	Temperature Control	Capacity	Size(WxDxH)	N.W
RKC-6	220-440V /3P / 50-60Hz	6kW	50-300 °C	10L	650 x 500 x 850mm	68Kg
RKC-9	220-440V /3P / 50-60Hz	9kW	50-300 °C	40L	1026x 706 x 803mm	135kg
RKC-9B	220-440V /3P / 50-60Hz	9kW	50-300 °C	40L	705x 695x 850mm	125Kg

## Marine Steam Rice Cooker

**Main Features**  
 Overall structure of stainless steel, sturdy and durable.  
 Water level controller for automatic water filling and water lack alerting.  
 Automatic heating system with fixed time and constant temperature.  
 Two type of door can be chosen:designed with visible glass window or completely stainless steel.



Model	Voltage	Rating	Crew Number	Capacity	Size(WxDxH)	N.W
RFX-30	220-440V / 3P / 50-60Hz	6 kW	30 People	12.5 kg	600x500x950mm	75kg
RFX-60	220-440V / 3P / 50-60Hz	9 kW	60 People	17.5 kg	600x 500x1420mm	95kg
RFX-100	220-440V / 3P / 50-60Hz	12 kW	100 People	17.5 kg	950 x 860x1750mm	120kg



RFX-60



RFX-100

## Marine Electric Oven

### Main Features

Overall structure of stainless steel, imported temperature controller.  
Two sets of upper and lower heater, and can be independently control.  
Oven temperature can be set freely between 60° and 320°, and automatically keep constant temperature.  
Lower oven can be replaced for fermentation box according to requirements. Combined with baking tray bracket at the bottom.  
Two type of door can be chosen: designed with visible glass window, completely stainless steel type(B).



RKX-3



RKX-5



RKX-8



Model	Voltage	Rating	Baking Bread Capacity/Hour	Size(W×D×H)	N.W
RKX-3	220-440V/3P / 50-60Hz	3.6 kW	10 kg	830 x725 x410mm	80kg
RKX-5	220-440V/3P / 50-60Hz	4.5 kW	15 kg	1000 x725 x1000mm	230kg
RKX-8	220-440V/3P / 50-60Hz	8.1 kW	30 kg	1000 x725 x1136mm	330kg
RKX-10	220-440V/3P / 50-60Hz	10 kW	30 kg	1100 x725 x1620mm	380kg

## Marine Deep Fryer with Self Fire Extinguishing System

### Main Features


Product with stand-alone automatic and manual special fire extinguisher(U.S.A. AN SUL R-102 System).  
Overall structure of stainless steel.  
Two sets of working temperature control device and safety temperature control device being independently set.  
With high frequency alarm system. Host system reset device.  
Can be synchronous connect with the ship alarm system(Non-standard accessories).  
This product has pass the SOLAS(2009)15015371:2000 test.  
Attach with CCS&ABS Type Approval Certificate.



RZG-6



Model	Voltage	Rating	Capacity	Size(W×D×H)	N.W
RZG-6	220-440V/ 3P / 50-60Hz	6kW	20L	500x645x850mm	50kg
RZG-10	220-440V/ 3P / 50-60Hz	10kW	25L	500 x 670 x850 mm	60kg
With Self Fire Extinguishing System	220-440V/ 3P / 50-60Hz	6kW	20L	900 x 700 x1700 mm	190 kg





# Marine Mess Room Equipment

Marine Bain Marie



RWT-40

### Main Features

Completely 5/5 Structure .  
Warm Area Follow 1/1GN Pan Size. Two heating modes: electric radiant heating and steam heating.  
Hot Cabinet or Door Cabinet Below.



Model	Voltage	Rating	Service Plate Number	Size(WxDxH)	N.W
RWT-30	220-440V / 3 P / 50-60Hz	3kW	3 Sets	1350 x 620 x 850 mm	70 kg
RWT-40	220-440V / 3 P / 50-60Hz	4.5 kW	4 Sets	1450 x 620 x 850 mm	85 kg
RWT-50	220-440V / 3 P / 50-60Hz	4.5 kW	5 Sets	1850 x 620 x 850 mm	100 kg
RWT-60	220-440V / 3 P / 50-60Hz	5.1 kW	6 Sets	2100 x 650 x 850 mm	120kg

## Marine Electric Water Boiler

### Main Features

Stainless-steel integral structure, designed with heat preservation control.

Boiling type heating system.

Automatic water inlet (with anti-dry protection).

Two type can be chosen: combined with stainless steel bracket which can be fixed on the wall, standing-type.



Type	Voltage	Rating	Capacity	Size(WxDxH)	N.W
Wall Mounted	220-440V/ 3P / 50-60Hz	4.5 kW	Unlimited	400 x 300 x 670mm	25kg
Floor Stand	220-440V/ 3P / 50-60Hz	4.5 kW	Unlimited	400 x 520 x 1320mm	30kg
Integrated	220-440V/ 3P / 50-60Hz	4.5 kW	40 L	424 x 630 x 1300mm	40kg

## Marine Electric Water Heater

### Main Features

Electric Heating, easy to use

Protection Level: IP44, reliable and durable



Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
RGW-100	380V/ 3P / 50-60Hz	5 kW	100 L	Φ 540 x 1200mm	85kg
RGW-300	380V/ 3P / 50-60Hz	10 kW	300 L	Φ 870 x 1180mm	155kg
RGW-400	380V/ 3P / 50-60Hz	30 kW	400 L	Φ 610 x 1670mm	185kg

## Marine Ice Maker



### Main Features

Completely S/S Structure .

Imports of High-Quality Compressor . Europe's Technology & Production Process.

SD-22

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
SD-22	220V/ 1P/ 50-60Hz	0.22kW	22kg/h	500x480x 810mm	60kg

## Marine Standing-Type Water Dispenser

### Main Features

Provide both cold water and boiled water.

Fitted with Two-stage switch and gooseneck water pipe, very convenient.

Equipped with stabilized pressure of spray and the level of spraying can be adjusted.

Provided with activated carbon cleaning filter. Equipped with high backflow compressor, suitable for high frequency starting.



QJ-2A

Model	Voltage	Rating	Capacity	Water Supply	Temperature Display	Size(WxDxH)	N.W
QJ-2A	220V / 1P/ 50-60Hz	2 kW	20 L	20L/h	LED	430 x 320 x 1070mm	35Kg
QJ-2B	220V / 1P/ 50-60Hz	Heating: 0.8 kW Ice-Making: 0.162 kW	Hot: 5 L Cold: 4 L	8L/h 15L/h	LED	430 x 320 x 1050mm	35Kg

## Marine Coffee Machine



Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
RH-330	220V/1 P/ 50-60Hz	2.1 Kw	1.8 L	195 x360 x 425mm	10Kg

## Marine Microwave Oven



Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
EM-L520P	220V/1P/50-60Hz	1.35Kw	25L	540 x 460 x 373mm	10Kg

## Marine Toaster



Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
6AST	220V / 1P/ 50-60Hz	3.3kW	240 pcs/h	460 x 210 x225mm	5kg



## Marine Food Processing Equipment



### Marine Universal Cooking Machine



SZM-20

#### Main Features

- Sus Mixer Bowl
- W/ kneading Hook, Paddle & Whisk
- W/ Safety Guard Cover on The Bowl
- Additional Meat Grinder & Vegetable Slicer Attachment (Optional).

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
SZM-20	220V/ 1 P/ 50-60Hz	1.1kW	20 L	425 x 555 x 775mm	83kg
SZM-50	220-380V/ 3 P/ 50-60Hz	2.6kW	50 L	585 x 855 x 1160mm	210kg

### Marine Potato Peeler



PP8

#### Main Features

- Sus Construction Interior & Exterior .
- High-Speed Water Protection Motor .
- Additional Sus Floor Standing Foundation W/ Filter (Optional).

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
PP8	220V/ 1 P/ 50-60Hz	0.37kW	8kg	490 x 480 x 800mm	52Kg
PP15	220V/ 1 P/ 50-60Hz	0.75kW	15kg	575 x 530 x 905mm	66Kg
PP30	220V/ 1 P/ 50-60Hz	1.5kW	30kg	590 x 590 x 1020mm	87Kg

## Marine Dough Mixer



SZH-20

### Main Features

Sus Mixer Bowl .  
W/ Safety Guard Cover on The Bowl.  
Different Capacity & Model to Choose.

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
SZH-20	220V	1.1kW	20L (8KG)	380x 630 x 760mm	100kg
SZH-30	220V	1.8kW	36L (12.5KG)	455 x 7115x 865mm	139kg
SZ-15	220/380	1.1kW	15L (15KG)	680 x 520 x 700mm	68kg
SZ-25	220/380	1.5kW	25L (25KG)	800x 580x 740mm	86kg

## Marine Meat Slicer



SA-250

### Main Features

Polished Anodized Aluminum Finish Body.  
Sus Constriction Blade .  
Cut Thickness 0 to 15 mm .  
W/ Safety Guide & Self- Sharpening Device.

Model	Voltage	Rating	Size(WxDxH)	N.W
SA-250	220V/ 1 P/ 50-60Hz	0.22kW	520 x470 x460mm	25Kg

## Marine Dough Sheeter



TBD500T

### Main Features

Germany Design High quality.  
With NSF or CE Certification.

Model	Voltage	Rating	Size(WxDxH)	N.W
TBD-500	380-440V/ 3P/ 50-60Hz	0.37Kw	2100 x850x1100 mm	160Kg
TBD-500T	380-440V/ 3P/ 50-60Hz	0.37Kw	1800 x850x600 mm	130Kg
TBD-600	380-440V/ 3P/ 50-60Hz	0.75Kw	2500x960x1100 mm	200Kg

## Marine Bone Saw



JG210

### Main Features

Polished Anodized Aluminum Finish Body & Sus Working Table Top.  
Sus Constriction Blade . Additional Sus Floor Standing Foundation (Optional).

Type	Voltage	Rating	Saw Belt Speed	Workbench Size	Size(WxDxH)	N.W
Desktop	220V/ 1 P/ 50-60Hz	0.75kW	15 m/s	600 x 437mm	660 x 530 x 970mm	45Kg
Vertical	220V/ 1 P/ 50-60Hz	1.5kW	15 m/s	712 x 662mm	780 x 710 x 1690mm	98kg

# Marine Dish Washer Equipment



## Marine Tank Dishwasher

### Main Features

Overall structure of stainless steel, flip-up model.  
 360 ° Rotating ShoWer Arm to Ensure All-Side Cleaning.  
 Internal Water Circulation System. Program Control System.



XWJ-2A



XWJ-XD-25

Model	Voltage	Rating	Size(WxDxH)	N.W
XWJ-XD-25	220V / 1P / 50-60Hz	3.3 kW	580 x600 x 860mm	59kg
XWJ-2A	380V / 3P / 50-60Hz	16 kW	705 x830 x 15060mm	119kg

## Marine Dish Sterilizer

### Main Features

Completely S/S Structure . Automatic Control Sterilization .  
 Pressure sealed doors to prevent the leakage of heat. Large Capacity Could Be disinfected Bigger Item.



RTP-350

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
RTP-350	220V / 1P / 50-60Hz	2.7kW	350 L	720 x 535 x 1665mm	53kg



## Marine Refrigeration Equipment

## Marine Stainless Steel Kitchen Refrigerator (Chiller/Freezer)

### Main Features

Completely 5/S Structure .  
 Imports of High-Quality Compressor. Digital Display  
 Temperature Control. Opening Door W/ Lock & Lock Panel.  
 Chiller , Freezer & Cambi Model.



SCDL500B2



SCDL1000B4



SCDL1600B6



Model	Voltage	Rating	Size(W×D×H)	Capacity	N.W
SCDL500B2	220V / 1 P/ 50-60Hz	0.28kW	600 x 700 x1955mm	500L	87kg
SCDL1000B4	220V / 1 P/ 50-60Hz	0.35kW	1200x 700 x1955mm	1000L	120kg
SCDL1600B6	220V / 1 P/ 50-60Hz	0.65kW	1800 x700 x 1955mm	1600L	170kg



## Marine Associated Equipment

### Marine Washing Machine



XOG-65



XOG-15

#### Main Features

Front Loading Type, Heavy Duty Version. Sus Drum & Tub.  
Electric Heating System With Safety Control. Automatic Washer Process Control.  
Europe's Technology & Production Process.  
Different Capacity & Model to Choose.

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
XOG-65	220V/ 1P/ 50Hz	0.4kW	6.5kg	600 x596 x850mm	69kg
XOG-15	380-440V / 3P/ 50-60Hz	13.5kW	15kg	1190900x1600mm	300kg

### Marine Clothes Dryer



XOG-65



XOG-15

#### Main Features

Front Loading Type, Heavy Duty Version. Sus Drum & Tub.  
Electric Heating System With Safety Control. Automatic Dryer Process Control.  
Europe's Technology & Production Process. Different Capacity & Model to Choose.

Model	Voltage	Rating	Capacity	Size(WxDxH)	N.W
T25	380-440V / 3P/ 50-60Hz	12kW	11.3kg	711x 1038 x1622mm	135kg
T30	380-440V / 3P/ 50-60Hz	21kW	13.6kg	711x1191x1622mm	150kg
T35	380-440V / 3P/ 50-60Hz	24kW	15.9kg	800 x1191x1622mm	164kg

## Marine Waste Packing Machine

### Main Features

- Sophistication—Patented hydro cylinder and oil immersed power integrated drive
- Miniature-Taking very small area
- High efficiency-Reducing volume greatly
- Safety-Intelligent control and detecting
- Environment protection-Sterilization safe storage and optimizing environment
- Packing-Sealed garbage bag or sealed garbage bin

LC-25T



Model	Voltage	Rating	Capacity	Max Pressure	Packing Period	Disposer Volume	Size(W×D×H)	N.W
LC-25T	220-440V / 3 P / 50-60Hz	1.1kW	150 L	2.5 T	35 S	75 L	500X 600X 1800mm	75kg

## Marine Wall Folding Ironing Board



Model	Size(W×D×H)	N.W
925	800 x 360 x 1275mm	6.5kg

## Marine Steam Iron



Model	Voltage	Rating	Size(W×D×H)	N.W
C2810	220V / 1P / 50-60Hz	1.8kW	300 x 115 x 150mm	1.5kg

## Marine Waste Disposer



ISE55



CSJ15

Model	Voltage	Rating	Capacity	Size(W×D×H)	N.W
ISE55	220V / 1 P / 50-60Hz	0.41kW	1-3 kg/min	Φ 173X 318 mm	20kg
ISE65	220V / 1 P / 50-60Hz	0.485kW	2-5 kg/min	Φ 184X 318 mm	25kg
CSJ-15	220-440V / 3 P / 50-60Hz	1.5kW	1-15 kg/min	Φ 380X 832 mm	120kg

## Marine Ironing Machine

### Main Features

- Roller ironing method.
- Electric heating system and safety control device. Most advanced technology and production process from Europe.
- Various models and specifications. capable of satisfying selection requirements with different number of people.



Model	Voltage	Rating	Size(W×D×H)	N.W
IB42310	380-440V / 3P / 50-60Hz	5Kw	1400 x 510 x 1030mm	117Kg
IB42314	380-440V / 3P / 50-60Hz	7.2Kw	1800 x 510 x 1190mm	140Kg